INSTALLATION INSTRUCTIONS

Model # 9089

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.


AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.


- 1. Shut off power at the circuit breaker and remove old fixture including mounting hardware.
- 2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
- 3. Unscrew the finial (N), move the rubber (M), decorative metal plate (L) and the bottom glass (K), then move the cage (I).
- 4. Pull black and white wires out of electrical outlet box (A).
- 5. Thread the two studs (B) into the pre-drilled holes in the circular strap (E) spaced the same distance apart as the holes in the canopy (G), and then tighten with the Nut (C)
- Attach circular strap (E) using Outlet Box Screws (D) to the outlet box (A) (Fig 1).
- 7. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's Ground wire to it. Otherwise, connect the fixture's Ground wire directly to the circular strap using the Green Screw (F) provided.
- 8. Place the canopy (G) into stud (B) and secure it tightly against the wall using cap nut (H). (Fig 1)
- Install 4*25W/E12/B bulb (no bulb included) in accordance with the fixture specification—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)
- Replace the cage (I), have the bottom glass (K), decorative plate (L) and rubber (M) through the nipple (J), then secure with the finial (N).

Your installation is now complete. Return power to the outlet box and test the fixture.

<u>"CAUTION-RISK OF FIRE CONSULT A</u> <u>QUALIFIED ELECTRICIAN TO ENSURE</u> <u>CORRECT BRANCH CIRCUIT CONDUCTOR"</u>

ATTENTION – RISQUE D'INCENDIE, CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS. Fig. 1

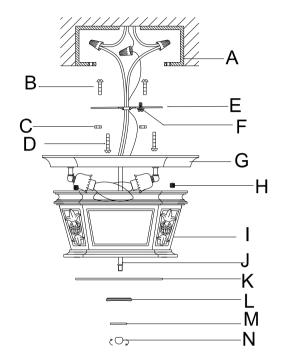







U.S. Patent: D511,857 This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws.