



Black Solid



White Solid



Stainless Solid

### Key Features

- Refrigerator volume of 2.1 cu ft (59,5 liters) holds up to 24 bottles (12 oz / 330 ml) or 44 cans (12 oz / 330 ml)
- Mechanical Dial Control is conveniently located on the grille
- Temperature range: 34°F - 45°F (1°C - 7°C)
- Daily ice produces up to 18 lb (8,2 kg) of ice
- Up to 13 lb (5,9 kg) in ice storage capacity
- Crescent ice cube dimensions: 1/2" W x 3/4" H x 2 1/4" L (12,7 mm W x 19 mm H x 57 mm L)
- No drain required
- Two removable tempered glass shelves
- Two fixed storage compartments in door
- Standard travel package includes door latch, ensuring safe-at-sea storage
- Corrosion and UV resistant components provide product longevity in harsh environments
- Built-in or freestanding


### Model Details

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UMRI121-BS02A	230 / 50	Field Reversible	Black Solid	94 lb (43 kg)
UMRI121-WS02A	230 / 50	Field Reversible	White Solid	94 lb (43 kg)
UMRI121-SS02A	230 / 50	Field Reversible	Stainless Solid	94 lb (43 kg)

### Accessories

Model	Description	Finish	Shipping Weight
ULAWATERHOOKUP	Braided water supply line kit	N/A	2 lb
U-POWERCORD-2056	Power Cord 220 - 240 V Great Britain/Ireland	N/A	N/A
U-POWERCORD-2256	Power Cord 220 - 240 V Australia/New Zealand	N/A	N/A
U-POWERCORD-2667	Power Cord 220 - 240 V Continental Europe	N/A	N/A
U-POWERCORD-3071	Power Cord 220 - 240 V China	N/A	N/A
U-POWERCORD-3111	Power Cord 220 - 240 V India	N/A	N/A




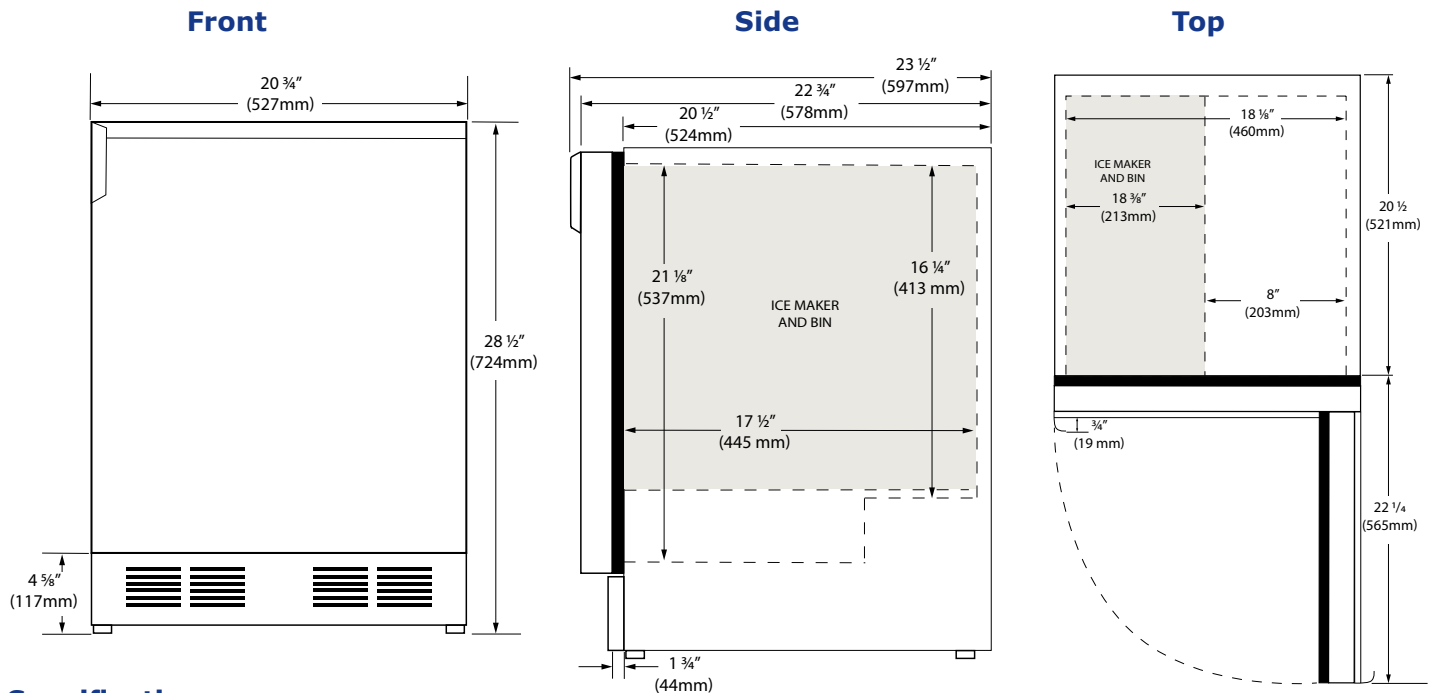


### Specifications

Model	MRI121
Amps: Running (220-240v)	1.2 amps
Amps: Max Start Up (220-240v)	6 amps
Capacity: Bottle	24 (12oz/330ml)
Capacity: Can	44 (12oz/330ml)
Capacity: Volume	2.1 cu ft (59 liters)
Defrost Type	Manual
Dimensions: Product Depth	22 3/4" (578 mm)
Dimensions: Product Height	28 1/2" (724 mm)
Dimensions: Product Width	20 3/4" (527 mm)
Ice Production Per Day	18 lb
Ice Storage	13 lb
Product Weight: Max	85 lb (39 kg)
Refrigerant Type	R600a
Sabbath (Star K Certified)	No
Temperature Range	34°F - 45°F (1°C - 7°C)

### Back

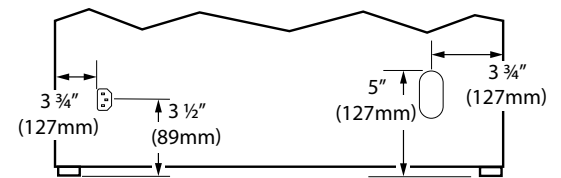

### Cabinet Cut-Out

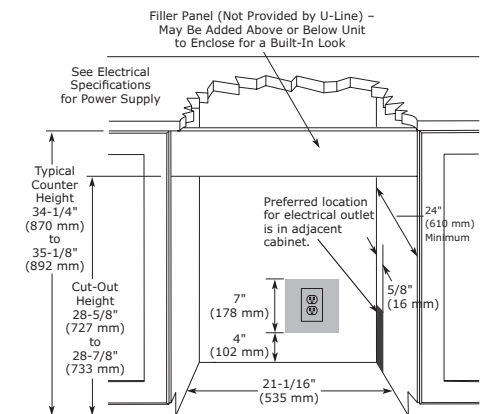

### Installation Notes

- Cutout includes the additional 1/4" (6,4 mm) width overall to ensure proper installation.
- No additional clearance around sides, top or rear of unit is needed for ventilation.
- Do not obstruct front grille air flow



### Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + **Additional 1 Year (parts & labor) warranty at no cost with product registration**



See complete warranty for details

Please visit [u-line.com](http://u-line.com) to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.

8900 North 55th Street • Milwaukee, Wisconsin 53223 USA • +1.414.354.0300 • [sales@u-line.com](mailto:sales@u-line.com) • [u-line.com](http://u-line.com)