



Catalog Number	
Notes	Type

Indoor Decorative

# Riser Wrap Linear

CLASSIC COLLECTION  
Linear T8 Fluorescent



## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in offices, kitchens and other rooms in the home.

### ATTRIBUTES

Polished brushed bronze end caps have a stepped appearance for subtle design interest on this traditional linear fixture. A white, textured acrylic diffuser wraps around the side of the fixture to meet a polished brushed bronze trim that runs the length of the fixture. The diffuser lifts & shifts (length-wise) to allow for tool-free re-lamping.

Utilizes (2) 32W linear T8 lamps for energy efficiency, superior color rendering and long life (not included).

Standard with 120 volt, 60Hz electronic ballast ensures no flickering and quiet operation without interfering with other electronics.


For use with non-dimmable switches only.

### LISTING

CUL listed to US and Canadian safety standards and suitable for damp locations. ENERGY STAR® qualified.

### WARRANTY

Guaranteed for two years against mechanical defects in manufacture.

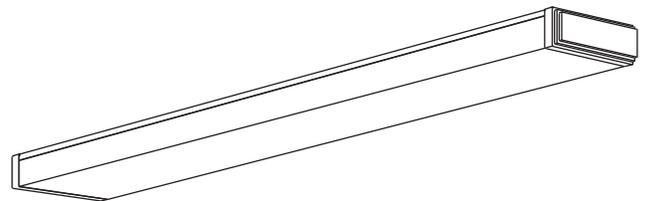


## DIMENSIONS

Nominal Size	Lamp Configuration	Model Number	Number of Lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Depth* inches (cm)
1' x 4'		10648RE	(2) 32W linear T8	7-9/16" (17.7)	49-5/8" (124.5)	2-3/4" (6.9)

\* Extension from ceiling

All dimensions are in inches (centimeters)

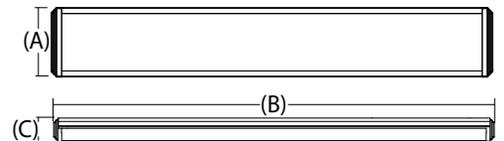

## ORDERING INFORMATION

Example: **10648RE BZ**

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers.

<b>10648RE</b>	
Model Number <sup>1,2</sup>	
<b>10648RE</b>	(2) 32W linear T8 lamps (Required)

<b>BZ</b>	
Ballast/Voltage	
(RE)	120-volt residential electronic ballast (standard)

<b>BZ</b>	
Finish	
<b>BZ</b>	Bronze

Other voltage and ballast types  
(Consult factory)

Accessories/Replacement parts

**DRIS48** White textured acrylic diffuser

Notes:  
1. Lamps not included.  
2. Use with non-dimmable switches only.

