


Submitted Model No	.:
Specific Features: _	



DELTA: LAVATORY FAUCETS

- Two Handle
- 3 Hole Sink Applications
- 4" Centerset

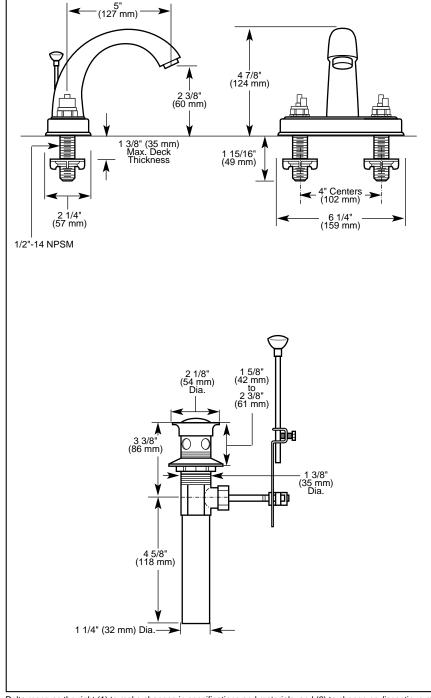





COMPLIES WITH:


- ASME A112.18.1
- CSA B125

Indicates ADA compliance to CABO/ANSI A117.1

- IAPMO Listed
- CSA Certified

STANDARD SPECIFICATIONS:


- Two handle lavatory deck faucets for exposed mounting on three hole sinks.
- 4" (102 mm) centerset.
- Solid brass fabricated body.
- 5" (127 mm) long, 4 7/8" (124 mm) high rigid spout.
- Hot and cold stems are interchangeable.
- Brass stems with 1/4 turn handle stops.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 1/2"-14 NPSM threaded male inlet shanks.
- Models have metal drain with pop-up type fitting with plated flange and stopper.



Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only.

Standard Features	2583-LHP	2583-CBLHP	2583-NNLHP	2583-PBLHP
Washerless		•	•	•
Three Hole Installation		♦	•	•
4" (102 mm) Centerset		♦	♦	•
5" (127 mm) Long, 4 7/8" (124 mm) High Rigid Spout		•	•	•
Less Handle Program See Handle Kit Options*		•	•	•
Brass Stems with 1/4 Turn Handle Stops		•	•	•
1/2"-14 NPSM Threaded Male Inlet Shanks		♦	•	•
Metal Pop-Up Drain		♦	•	•
Chrome Finish				
Chrome and <i>Brilliance®</i> Polished Brass Finish		•		
<i>Brilliance</i> [®] Pearl Nickel			•	
Brilliance® Polished Brass Finish				♦

*Available LHP Handle Options

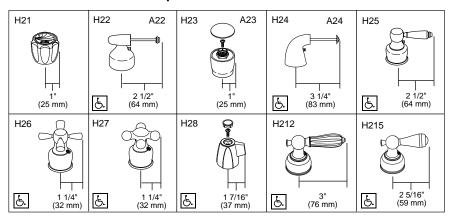

*Available LHP Handle Accent Options with Matching Lift Knobs

