

# EL1499RA; EL1499R EL1499R-277

4" Low Voltage Remodel Housing with Thermal Protector, Complete with 12 Volt Thermally Protected Magnetic Transformer.



## PROJECT INFORMATION:

Project Name: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Date: \_\_\_\_\_

## DIMENSIONS

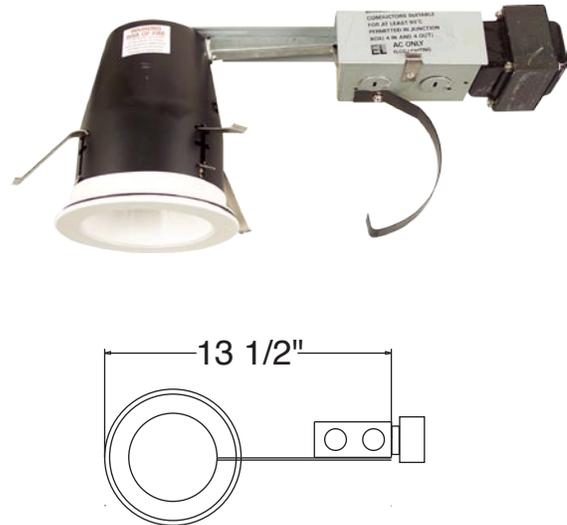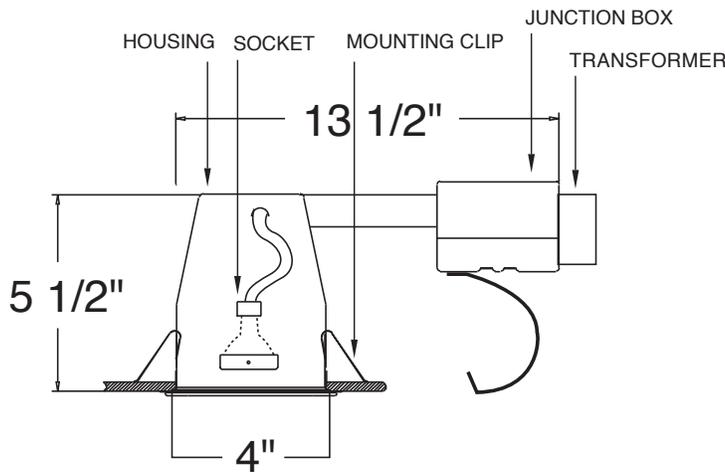

## PRODUCT SPECIFICATIONS

Housing Features: For use in existing ceilings. Integral thermal protector guards against improper lamping. Single Wall Construction.

Lamp: 12V, 50W Maximum; MR16

Lamp Holder: MR16 Socket

The EL1499RA housing meets restricted air flow requirements.

Trim Ring: Polycarbonate trim ring, metal trim ring, designed to conceal ceiling cut-out.

Magnetic Transformer Included.

EL1499R = 120V to 12V, 50VA

EL1499RA = 120V to 12V, 50VA

EL1499R-277 = 277V to 12V, 50VA

## INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" and 3/4" knockout. U.L. listed/C.U.L. listed: for through branch wiring, maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

Mounting Frame: Stamped steel material and painted for corrosion resistance.

- Labels:
- U.L. listed for damp locations.
  - U.L. listed for feed through.

Mounting: (4) remodel clips secure housing and accommodate various ceiling thicknesses.

## CATALOG NUMBER

Example: EL1499R - EL1421C

See trim page for variety of trims available

2042 East Vernon Avenue, Vernon, CA 90058 • Tel: (323) 231-2600 Fax: (323) 231-3200 • www.elcolighting.com

© ELCO LIGHTING 2006 All Rights Reserved. Rev. April 2006. ELCO Lighting reserves the right to make specification and design changes without notice. LIGHTING

