

# PORCHER SOLUTIONS™ 1-PC COMPACT ELONGATED WATER CLOSET VITREOUS CHINA

## 96010-60 - Compact Elongated

- LXP (Luxury Performance) Toilet
- Design-matched to the Porcher Solutions<sup>™</sup> Collection
- Made of Vitreous China
- · Compact design fits into the same space as a round front
- Everclean Surface® inhibits the growth of stain and odor causing bacteria, mold and mildew on the surface
- Low-consumption (1.6 gpf /6.0 Lpf)
- 3" Flush Valve with Chemical Resistant Flapper
- · Elongated siphon action jetted bowl with a 2" fully-glazed trapway
- Rim height 16-1/2" for accessible application (ADA)
- Includes a high quality Duroplast slow-close toilet seat with an easy lift-off feature and color matched hinges
- Chrome metal trip lever
- 9-1/4" x 8-1/4" water surface area
- 12" Rough-in
- 10 Year Warranty
- Available in White (001) or Biscuit (071)

#### Nominal Dimensions:

28-1/4" x 14-12" x 30-3/4" (717 x 366 x 782mm)

#### Water Closet Colors:



## **Kit Components:**

70320 Seat

### **Optional Trip Levers** in Jado Matched Finishes:

- 80010-00.100 Polished Chrome
- \* 80010-00.105 Old Bronze
- 80010-00.144 Brushed Nickel
- 80010-00.150 Polished Nickel
- **80010-00.167** Diamond
- \* 80010-00.355 Ultra Steel
- 80010-00.444 Antique Nickel



#### **Trip Lever Colors:**



100

355



105



144



Brushed Nickel Polished Nickel 150




Ultra Steel Antique Nickel 444

ROUGH IN DIAGRAM SHOWN **ON REVERSE SIDE** 

# ) lorcher

# PORCHER SOLUTIONS™ 1-PC COMPACT ELONGATED WATER CLOSET

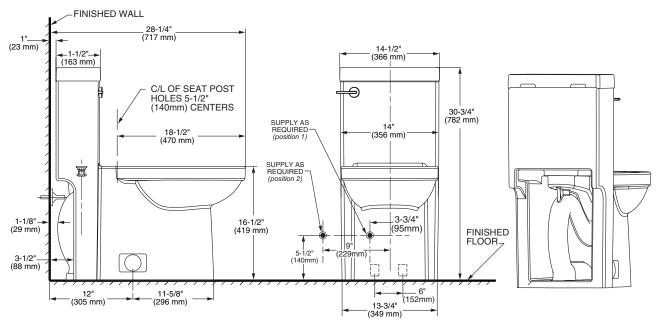

IMPORTANT: Water supply on the wall is required at 3-3/4" or 9" from centerline of the toilet (see rough-in). First suggested position is hidden behind the toilet. The geometry of the toilet gives space for this installation. The second suggested position is next to the toilet. Between these two positions, the space for the supply between wall and toilet is limited to 3-1/4". In this case, check your supply and hose dimensions.

#### NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 12 (305MM) FROM FINISHED WALL TO C/L OF OUTLET. SUPPLIES NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY. ★ DIMENSIONS SHOWN FOR LOCATION OF SUPPLY ARE SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by applicable ASME standards. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



WATER CLOSET HEIGHT of 16-1/2" (419mm) IS IN COMPLIANCE WITH AMERICAN DISABILITIES ACT (ADA) GUIDELINES AND ANSI A117.1

REQUIREMENTS FOR THE PHYSICALLY CHALLENGED.

#### To Be Specified:

- □ Color:
- □ Trip Lever Finish:

#### **Compliance Certifications:**

- Meets or Exceeds ASME A112.19.2 / CSA B45.1
- Includes Flush Performance, Ball Pass Diameter, Trap Seal Depth and all Dimensions