



Compact Fluorescent


**8" Pro-Optic™
Alzak® Open Wallwasher
2-Lamp Horizontal
Non-IC**

Recessed

Type _____
 -21 -22
 P8132

Catalog No.	Finish		Dimensions (Inches)		
	Clear Alzak®	Gold Alzak®	A	B	C
P8132	-21	-22	9-3/4	8	7-1/8

Maximum Ceiling Thickness: 1-1/4"

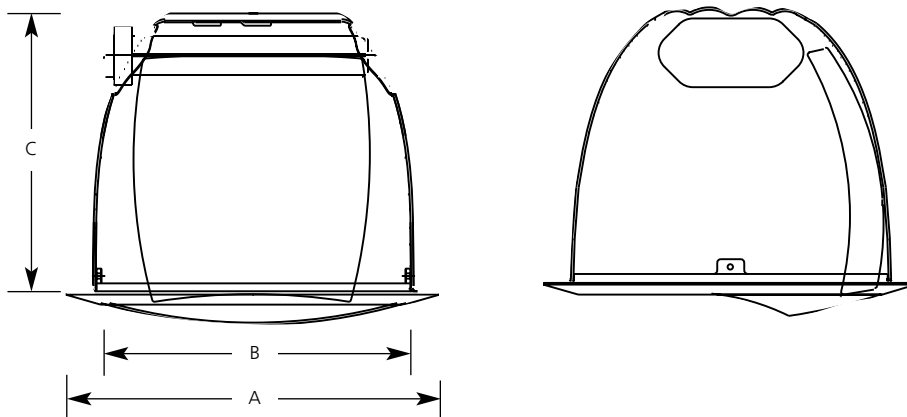

*Lamps shown are 26w quad tube compact fluorescent

Lamp Wattage

Housing	IC	Non-IC
P8213	N/A	2 13w Twin or Quad
P8218	N/A	2 18w Quad
P8226	N/A	2 26w Quad

Specifications:

Flange

- Bright white enamel painted metal flange

Trim

- All aluminum construction
- One piece construction with integral flange
- No light leaks around trim flange
- Socket box mounts to trim for optimum performance, and consistent lamp position
- Trim retention accompanied by 3 spring clips attached to frame-in
- Specular anti-iridescent Alzak® finish

Kicker


- Clear diffuser anodized finish
- Riveted to reflector in lower portion of kicker
- Minimal high angle brightness

Labeling

- UL-CUL damp location listed
- Rated Non-IC

Progress Lighting
 Post Office Box 5704
 Spartanburg, South Carolina
 29304-5704

www.progresslighting.com
 Patent# 6,254,257

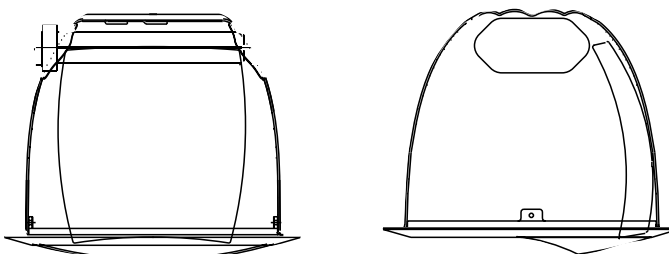

INITIAL FOOTCANDLE READINGS

Two Feet from Wall

Dist. from Ceiling	Two Foot Centers		Three Foot Centers		
	Fixture	Fixture	Fixture	Fixture	Fixture
1	2.3	2.3	1.7	1.6	1.7
2	7.7	7.7	6.9	5.0	6.9
3	8.0	8.0	5.5	6.4	5.5
4	8.1	8.1	5.1	6.3	5.1
5	6.6	6.6	4.5	4.8	4.5
6	4.7	4.7	3.8	3.6	3.8
7	3.4	3.4	3.1	2.7	3.1
8	2.6	2.6	2.5	2.2	2.5
9	2.1	2.1	2.1	2.0	2.1

Three Feet from Wall

Dist. from Ceiling	Three Foot Centers			Four Foot Centers		
	Fixture	Fixture	Fixture	Fixture	Fixture	Fixture
1	1.1	1.1	1.1	1.0	0.9	1.0
2	2.3	1.5	2.3	2.2	1.0	2.2
3	3.6	4.0	3.6	3.3	2.7	3.3
4	3.8	4.2	3.8	3.0	3.3	3.0
5	3.9	4.3	3.9	3.0	3.9	3.0
6	4.1	4.0	4.1	3.0	3.7	3.0
7	3.7	3.4	3.7	2.9	3.1	2.9
8	3.1	2.8	3.1	2.6	2.5	2.6
9	2.6	2.4	2.6	2.4	2.2	2.4


P8132-21/P8213

8" Pro-Optic Clear Alzak Wall Washer

Report No. 2000168

No. Lamps: 2 Type: CF13 Quad GE Lumens: 1720

Reflectances: 80% Ceil., 50% Wall, 20% Floor

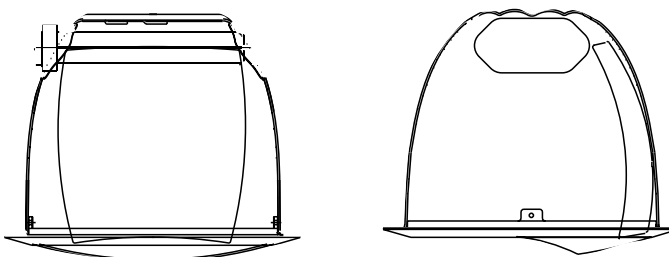

INITIAL FOOTCANDLE READINGS

Two Feet from Wall

Dist. from Ceiling	Two Foot Centers		Three Foot Centers		
	Fixture	Fixture	Fixture	Fixture	Fixture
1	4.5	4.5	3.6	2.6	3.6
2	19.2	19.2	16.4	12.1	16.4
3	16.3	16.3	9.3	12.3	9.3
4	12.8	12.8	8.8	9.0	8.8
5	9.1	9.1	7.6	6.7	7.6
6	6.5	6.5	6.1	5.2	6.1
7	4.8	4.8	4.7	4.2	4.7
8	3.7	3.7	3.8	3.4	3.8
9	3.2	3.2	3.2	3.0	3.2

Three Feet from Wall

Dist. from Ceiling	Three Foot Centers		Four Foot Centers		
	Fixture	Fixture	Fixture	Fixture	Fixture
1	1.9	1.8	1.9	1.7	1.6
2	7.1	4.0	7.1	6.7	2.0
3	9.1	9.5	9.1	8.0	7.0
4	8.1	8.1	8.1	5.4	7.6
5	7.6	6.7	7.6	5.6	6.3
6	6.3	5.4	6.3	5.3	5.0
7	5.1	4.5	5.1	4.7	4.0
8	4.3	3.8	4.3	4.1	3.5
9	3.7	3.4	3.7	3.6	3.2


P8132-21/P8213EB

8" Pro-Optic Clear Alzak Wall Washer

Report No. 2000169

No. Lamps: 2 Type: CF13 Quad GE Lumens: 1800

Reflectances: 80% Ceil., 50% Wall, 20% Floor

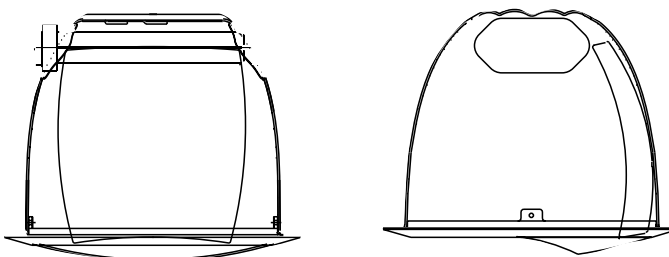

INITIAL FOOTCANDLE READINGS

Two Feet from Wall

Dist. from Ceiling	Two Foot Centers		Three Foot Centers		
	Fixture	Fixture	Fixture	Fixture	Fixture
1	4.7	4.7	3.8	2.8	3.8
2	20.0	20.0	17.1	12.7	17.1
3	17.1	17.1	9.7	12.9	9.7
4	13.3	13.3	9.2	9.4	9.2
5	9.5	9.5	8.0	6.9	8.0
6	6.8	6.8	6.4	5.5	6.4
7	5.0	5.0	4.9	4.3	4.7
8	3.9	3.9	3.9	3.6	3.9
9	3.3	3.3	3.3	3.1	3.3

Three Feet from Wall


Dist. from Ceiling	Three Foot Centers		Four Foot Centers		
	Fixture	Fixture	Fixture	Fixture	Fixture
1	2.0	1.9	2.0	1.8	1.6
2	7.4	4.2	7.4	7.0	2.1
3	9.6	10.0	9.6	8.4	7.3
4	8.4	8.5	8.4	5.6	7.9
5	8.0	7.0	8.0	5.8	6.6
6	6.6	5.7	6.6	5.6	5.2
7	5.4	4.6	5.4	4.9	4.2
8	4.5	4.0	4.5	4.3	3.7
9	3.8	3.6	3.8	3.8	3.3

P8132-21/P8218
8" Pro-Optic Clear Alzak Wall Washer

Report No. 2000170

No. Lamps: 2 Type: CF18 Quad Sylvania Lumens: 2500

Reflectances: 80% Ceil., 50% Wall, 20% Floor

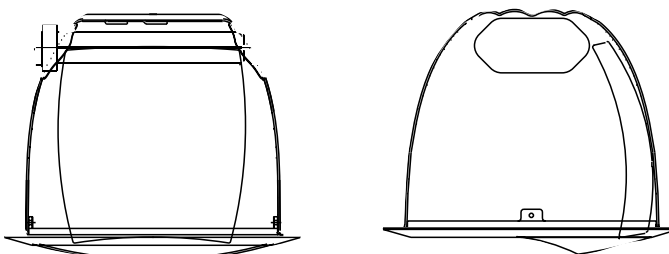

INITIAL FOOTCANDLE READINGS

Two Feet from Wall

Dist. from Ceiling	Two Foot Centers		Three Foot Centers		
	Fixture	Fixture	Fixture	Fixture	Fixture
1	8.0	8.0	6.6	4.3	6.6
2	29.0	29.0	23.3	18.3	23.3
3	25.9	25.9	16.6	19.5	16.6
4	20.1	20.1	14.0	14.7	14.0
5	14.1	14.1	11.3	10.7	11.3
6	9.9	9.9	9.0	8.1	9.0
7	7.3	7.3	7.0	6.3	7.0
8	5.7	5.7	5.6	5.1	5.6
9	4.8	4.8	4.7	4.5	4.7

Three Feet from Wall

Dist. from Ceiling	Three Foot Centers			Four Foot Centers		
	Fixture	Fixture	Fixture	Fixture	Fixture	Fixture
1	2.9	2.9	2.9	2.6	2.4	2.6
2	10.8	6.8	10.8	10.1	3.5	10.1
3	13.4	13.8	13.4	11.2	10.4	11.2
4	13.0	13.2	13.0	9.6	11.4	9.6
5	11.8	11.3	11.8	8.9	10.1	8.9
6	9.9	9.0	9.9	8.1	8.1	8.1
7	8.0	7.3	8.0	7.1	6.5	7.1
8	6.6	6.0	6.6	6.1	5.5	6.1
9	5.6	5.3	5.6	5.4	4.9	5.4


P8132-21/P8218EB

8" Pro-Optic Clear alzak wall Washer

Report No. 2000171

No. Lamps: 2 Type: Cf18 Quad Sylvania Lumens: 2500

Reflectances: 80% Ceil., 50% Wall, 20% Floor

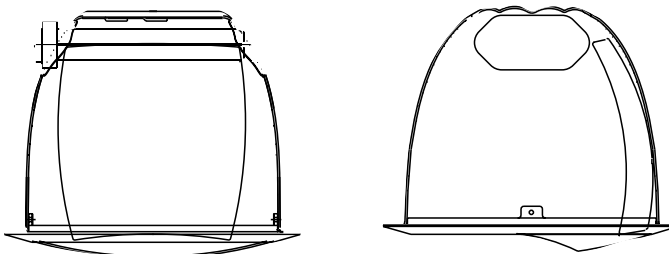

INITIAL FOOTCANDLE READINGS

Two Feet from Wall

Dist. from Ceiling	Two Foot Centers		Three Foot Centers		
	Fixture	Fixture	Fixture		
1	7.9	7.9	6.6	4.3	6.6
2	28.5	28.5	23.3	18.3	
23.3					
3	25.9	25.9	16.6	18.5	
16.6					
4	20.1	20.1	14.0	14.7	
14.0					
5	14.1	14.1	11.3	10.7	
11.3					
6	9.9	9.9	9.0	8.1	9.0
7	7.3	7.3	7.0	6.3	7.0
8	5.7	5.7	5.6	5.1	5.6
9	4.8	4.8	4.7	4.5	4.7

Three Feet from Wall


Dist. from Ceiling	Three Foot Centers		Four Foot Centers		
	Fixture	Fixture	Fixture	Fixture	Fixture
1	2.9	2.9	2.9	2.6	2.4
2	10.8	6.8	10.8	10.1	3.5
10.1					
3	13.4	13.8	13.4	11.2	10.4
11.2					
4	13.0	13.2	13.0	9.6	11.4
5	11.8	11.3	11.8	8.9	10.1
6	9.9	9.0	9.9	8.1	8.1
7	8.0	7.3	8.0	7.1	6.5
8	6.6	6.0	6.6	6.1	5.5
9	5.6	5.3	5.6	5.4	4.9

P6716-31 / P632-EB
6" Scoop Wall Washer

Report No. 98154

No. Lamps: 1 Type: 13w CF Triple Lumens: 2400

Reflectances: 80% Ceil., 50% Wall, 20% Floor

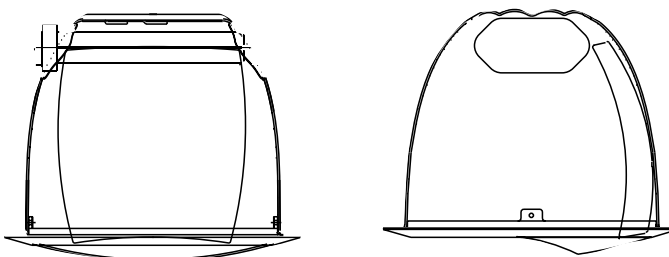

INITIAL FOOTCANDLE READINGS

Two Feet from Wall

Dist. from Ceiling	Two Foot Centers		Three Foot Centers		
	Fixture	Fixture	Fixture	Fixture	Fixture
1	9.4	9.4	7.6	6.2	7.6
2	8.4	8.4	6.7	6.0	6.7
3	6.5	6.1	5.0	4.7	5.0
4	4.3	4.3	3.6	3.5	3.6
5	3.1	3.1	2.7	2.6	2.7
6	2.3	2.3	2.1	2.0	2.1
7	1.8	1.8	1.7	1.6	1.7
8	1.4	1.4	1.4	1.4	1.4
9	1.2	1.2	1.2	1.2	1.2

Three Feet from Wall

Dist. from Ceiling	Three Foot Centers		Four Foot Centers		
	Fixture	Fixture	Fixture	Fixture	Fixture
1	4.4	4.1	4.4	3.9	3.9
2	4.9	4.7	4.9	4.3	4.3
3	4.5	4.3	4.5	3.9	3.9
4	3.8	3.7	3.8	3.3	3.3
5	3.1	3.0	3.1	2.7	2.7
6	2.5	2.4	2.5	2.2	2.2
7	2.0	2.0	2.0	1.9	1.9
8	1.7	1.7	1.7	1.6	1.6
9	1.4	1.4	1.4	1.3	1.3


P8132-21/P8226

8" Pro-Optic Clear Alzak Wall Washer

Report No. 2000173

No. Lamps: 2 Type: CF26 Quad GE Lumens: 3650

Reflectances: 80% Ceil., 50% Wall, 20% Floor

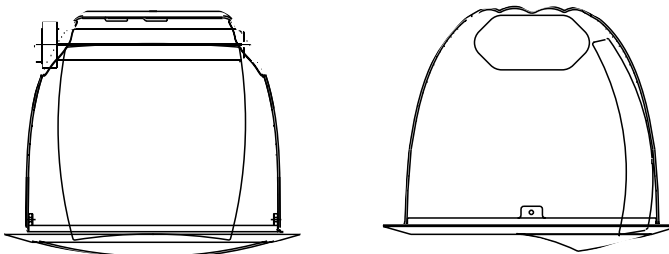

INITIAL FOOTCANDLE READINGS

Two Feet from Wall

Dist. from Ceiling	Two Foot Centers		Three Foot Centers		
	Fixture	Fixture	Fixture	Fixture	Fixture
1	10.5	10.5	8.9	5.6	8.9
2	44.1	44.1	37.6	28.0	37.6
3	40.1	40.1	26.0	28.6	26.0
4	29.5	29.5	21.7	21.6	21.7
5	20.4	20.4	16.7	15.6	16.7
6	14.4	14.4	12.6	11.7	12.6
7	10.5	10.5	9.6	9.0	9.6
8	8.1	8.1	7.6	7.2	7.6
9	6.8	6.8	6.5	6.3	6.5

Three Feet from Wall

Dist. from Ceiling	Three Foot Centers		Four Foot Centers		
	Fixture	Fixture	Fixture	Fixture	Fixture
1	4.1	3.7	4.1	3.6	3.1
2	13.4	8.9	13.4	12.9	4.7
3	20.7	21.9	20.7	18.1	14.9
4	20.3	19.9	20.3	15.0	17.2
5	18.0	16.8	18.0	13.9	14.4
6	14.5	13.7	14.5	12.3	11.8
7	11.6	11.0	11.6	10.3	9.8
8	9.5	9.0	9.5	8.6	8.2
9	7.8	8.0	7.8	7.5	7.1