



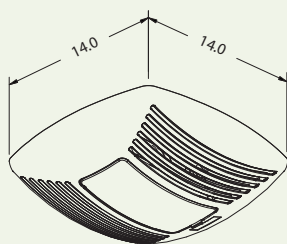

## Delta Breez Ventilation Fan / Light Combo Specifications


VFB25ADL  
(110 CFM)

### Dimensions

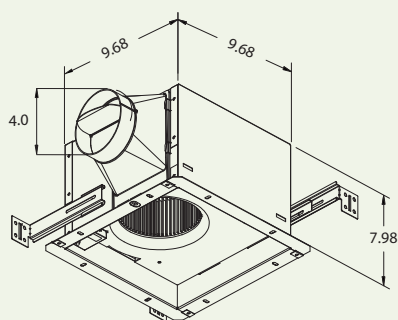

UNIT: INCH

### Fan Curve

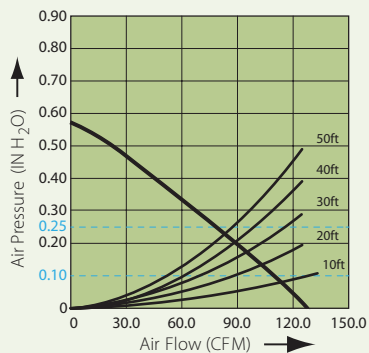

### Description

Low noise ceiling mount ventilating fan with DC Motor and light rated for continuous running. Evaluated by Underwriter Laboratories and conforms to both UL and cUL safety standards.

### Motor/Blower

- Power Rating of 120volts/60Hz.
- DC Brushless motor engineered to run continuously.
- Motor equipped with thermal cutoff fuse.
- Permanently lubricated motor.

### Housing

- Galvanized steel body.
- Detachable 4" diameter duct adapter.
- Built in backdraft damper.
- Easy installation.

### Grille

- Attractive design using ABS material.

### Light

- One GU24 26-Watt compact fluorescent lamp included.
- One E12 4-Watt night-light included.

### Warranty

- 3 year limited warranty.

### Features

- For ceiling mount only, air flow of 110 CFM ( $\pm 10\%$ ) and 1.1 Sones at 0.1" static pressure.
- Power consumption approximately 15.4 Watts with an efficiency rating approximately 7.14 CFM/Watt at 0.1" static pressure.
- Duct diameter no less than 4".
- UL and cUL listed for tub/shower enclosure when used with GFCI branch circuit wiring.

### DC Motor Technology

- Built in soft start function to increase bearings life.
- Automatically powers OFF when impeller is locked abnormally.

### Specifications

VFB25ADL	4" Duct (Standard)	
Static Pressure (Inches w.g.)	0.1	0.25
Air Flow (CFM)	110	89.2
Sones	1.1	1.4
Power Consumption (Watts)	15.4	17.2
Energy Efficiency (CFM/Watt)	7.14	5.15
Speed (RPM)	1037	1213
Current (Amps)	0.26 @ 120 Vac	
Power Rating (V/Hz)	120 / 60	
Lamp (Watts)	26	
Night-light (Watts)	4	