

INSTALLATION INSTRUCTIONS

Item#P399-613

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.

SUGGESTED INSTALLATION (Fig. 3)

3. Attach the mounting plate (D) to the junction box using mounting screws (E) (size: #5/32"-32*0.5"L.) as illustrated in **Fig. 3**
4. Determine the desired hanging height and thread rods (G, H) to assembly (I). Next place canopy (F) over rods (G,H) and thread hanger ball (C) to rod (G). Please remove the nipple if installing with one 6" rod only.
5. While holding the fixture body, install the fixture into the mounting plate (D) by tilting at a slight angle so that the hanger ball (C) slips into the mounting plate (D) as shown. Align the notch in the hanger ball (C) to the tab on the mounting plate (D) to prevent the fixture from turning.

CONNECTING THE WIRES (Fig. 2)

6. At this point, connect the electrical wire as shown in figure 3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the ground wires from the hanger ball and mounting plate to it. Otherwise, connect the ground wire from the hanger ball directly to the mounting plate ground wire and secure with wire connectors provided.
7. After wires are connected, tuck them carefully into the ceiling junction box, then place canopy (F) over the mounting plate (D) and secure with screws (S).

COMPLETING THE INSTALLATION (Fig.3)

8. Install 3*100W bulbs (Q) into socket (K) in accordance with the fixture's specification. **(DO NOT EXCEED THE SPECIFIED WATTAGE!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
9. Place the shade (M) onto shade holder (J) and secure with screws (R).
10. Thread rod (L) to the fixture (K)
11. Place the diffuser (N) onto rod (L) and secure with washer (O) and final (P).

Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Page.1/2

Fig.1

Set-Mounting# LTG BKT 10

-Mounting plate (1)

-Green screw (1)

-Mounting screw (2)

Rod#W39-1-613

Gauge 0.6"

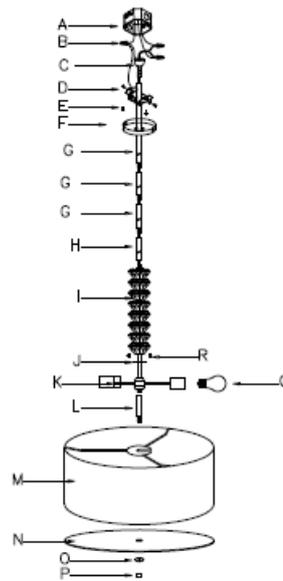


Fig.2



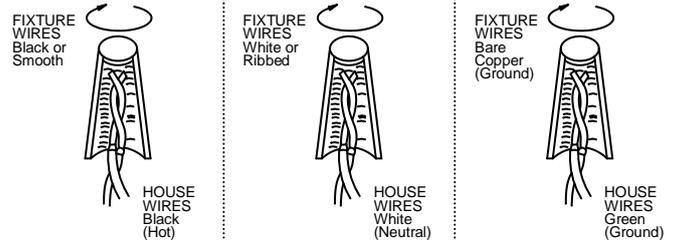



FIG.3

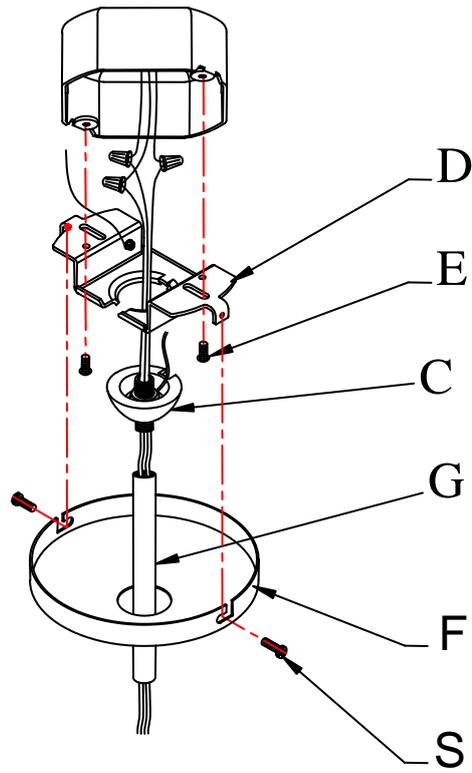

- a. Hardware Bag:
 D. Mounting Plate*1
 F. Canopy*1
 S. Screw*2
 C. Hanger Ball*1

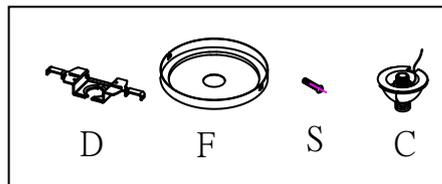

- b. Hardware Bag:
 G.Rod 12"*3
 H.Rod 6"*1



- C. Hardware Bag:

- L. Nipple*1
 O. Washer*1
 P. Final*1
 R.Screw*2

