

TOTO®


CST744EL Eco Drake® Close Coupled Toilet, ADA, 1.28 GPF




CST744EL - Eco Drake® Toilet, ADA Model
SS114 - SoftClose Seat



E-Max® Technology: Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose® toilet seat, or upgrade to a Washlet.



Standard 2" flush valve Wide 3" flush valve

Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.



- Contemporary, high profile design
- ADA Compliant
- E-Max® Technology
- Powerful, quiet flush every time
- Wide, 2-1/8" computer designed trapway
- Large water surface

High profile, ADA compliant close coupled toilet. Low consumption (1.28 Gpf/4.8 Lpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ **CST744EL**

Elongated, 12" rough-in, less seat

□ **C744EL**

Elongated bowl only, 12" rough-in.

□ **ST743E**

Drake tank and cover only. Complete with tank trim and coupling components.

□ **SS114**

SoftClose®: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

□ **SC134**

Elongated, open front seat with lid.

□ **SC534**

Elongated, open front seat less lid.



Colors:

Standard #01 Cotton

Trip Lever:

Standard #CP Chrome Plated

CST744EL

Eco Drake® Close Coupled Toilet, ADA, 1.28 GPF

■ PERFORMANCE

The TOTO® E-Max® low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

■ SPECIFICATIONS

Water Use:	1.28 Gpf / 4.8 Lpf
Flush System:	Gravity Feed (E-Max® System)
Min. Water Pressure:	8 psi
Water Surface:	10-3/8" x 8-1/4"
Trap Diameter:	2-1/8"
Rough-in:	12" rough-in
Trapseal:	2-3/8"
Warranty:	Five Year Limited Warranty
Material:	Vitreous china
Shipping Weight:	C744EL 56.5 lbs. ST743S 35 lbs.
Shipping Dimensions:	C744EL 29-1/2"L x 16"W ¹ x 10-1/4"W ² x 18-1/2"H ST743E 20-1/8"L x 8-1/4"W x 15-1/2"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.

Listing and approval: IAPMO/c-UPC, CSA, City of Los Angeles, State of MA, and others




Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor.

Recommended seat: SS114

These dimensions and specifications are subject to change without notice.

U.S. Patent: D406.329 5.918.325
5.983.413 and pending

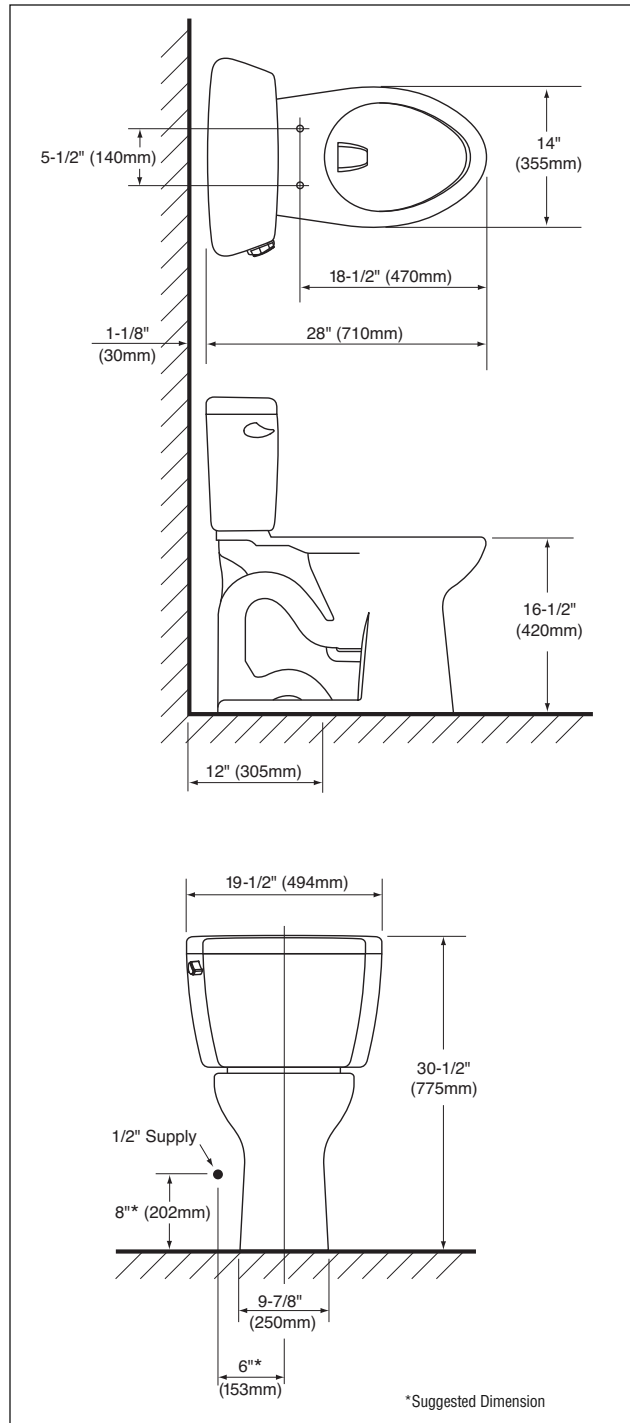

CST744EL - Eco Drake® Toilet, ADA Model

TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
Tel. (770) 282-8686 • Fax. (770) 282-8701 • www.totousa.com
Printed in U.S.A. © TOTO LTD. 03/07 #