

# ELKAY<sup>®</sup>

## SPECIFICATIONS

### EZH20™ – In-Wall Recessed Bottle Filling Station Models LZWSM8K & LZWSMDK

#### PRODUCT FEATURES

- Designed specifically for use with SwirlFlo<sup>®</sup> and Soft Sides<sup>®</sup> architectural fountains
- Space saving ADA-compliant design
- Sanitary, no-touch, sensor activation with automatic 30-second shut-off timer
- WaterSentry<sup>®</sup> Plus 3000 gallon filter included
- Silver ion anti-microbial protection
- Quick fill rate is 1.1 gpm for refrigerated units and 1.5 gpm for non-refrigerated units
- Visual user interface display includes:
  - Filter Monitor indicating when replacement is necessary
  - Green Ticker counts the quantity of 16 oz. bottles saved from the landfill for non-refrigerated units and 12 oz. bottles saved for refrigerated units
- Includes mounting frame for quick and simple installation
- Hinged door for easy servicing
- Constructed of durable 18 gauge stainless steel and ABS plastic

Model LZWSM8K provides 8.0 gph of 50° F water at 90° F ambient and 80° F inlet water. Model LZWSMDK is non-refrigerated and provides ambient water. Shall be recessed design and constructed of 18 gauge Type 300 series stainless steel and ABS plastic. Shall include electronic sensor for no-touch activation with automatic 30-second shut-off timer. Shall provide 1.1-1.5 gpm flow rate with laminar flow to minimize splashing. Shall include antimicrobial protected plastic components to prevent mold and mildew. Shall include the WaterSentry<sup>®</sup> Plus, certified to NSF/ANSI 42 and 53 for lead reduction, with visual monitor to indicate when replacement is necessary. Shall meet ADA guidelines for reach ranges, when properly installed. Shall be lead-free design which meets Safe Drinking Water Act and is certified to NSF/ANSI 61 and California AB1953. Unit shall be certified to UL399 and CAN/CSA 22.2 No. 120.

#### SUGGESTED SPECIFICATION


2222 Camden Court Phone: 630-572-3192  
Oak Brook, IL 60523 Web: Elkayusa.com



#### Third Party Certified to:

- UL399 and CAN/CSA 22.2 No. 120
- Lead-free compliance including NSF/ANSI 61 and CA AB1953

#### IMAGES

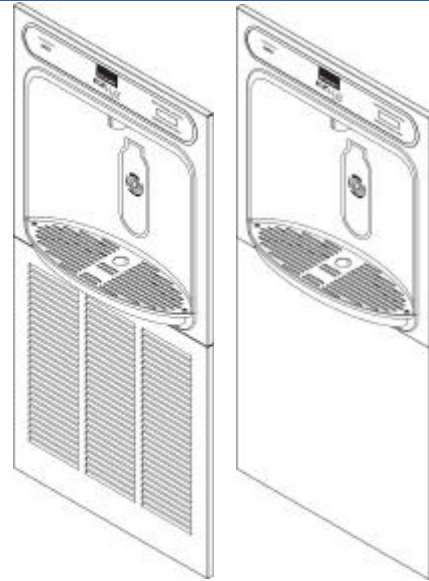

Model LZWSM8K  
(refrigerated)

Model LZWSMDK  
(non-refrigerated)

- 51300C - Single replacement filter
- 51300C\_3PK - Replacement filter 3-pack

#### OPTIONAL ACCESSORIES

Ideal for stand-alone applications or paired with SwirlFlo<sup>®</sup> and Soft Sides<sup>®</sup> fountains in:

- Educational facilities
- Healthcare facilities
- Sport and fitness centers
- Airports
- Office buildings
- Other commercial buildings

#### APPLICATIONS

