

ESCALE_{TM}

DROP-IN BATH

K-11343


Features

- Acrylic
- Complements the Escale™ Suite
- 71-5/8" (181.9 cm) x 35-5/8" (90.5 cm) x 24-1/8" (61.3 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1
- IAPMO/UPC
- CSA International

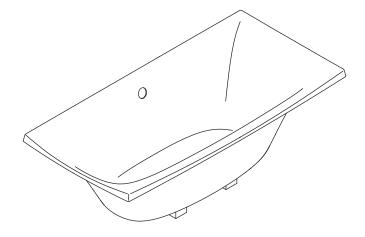

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- 0: White
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

| Model | Description | | Colors/Finishes | |
|---------------|---|------|-----------------|--|
| K-11343 | Drop-in bath | □ 0 | ☐ Other | |
| Recommend | ded Accessories* | · | · | |
| K-7214 | Bath drain OR | □ CP | ☐ Other | |
| K-7219 | Bath drain | □ CP | ☐ Other | |
| K-18486 | Symbol™ Roman bath filler with handshower | □ CP | ☐ Other | |
| *Refer to the | Kohler Price Book for additional bath faucet options. | | · | |
| Ontional Ac | | | | |
| Optional Ac | | | | |
| K-1676 | Pillow | □ 0 | ☐ Other | |
| K-1601 | Footstop | □ 0 | □ Other | |

Product Specification:

The drop-in acrylic bath shall be 71-5/8" (181.9 cm) in length, 35-5/8" (90.5 cm) in width, and 24-1/8" (61.3 cm) in height. Bath shall be made of acrylic. Bath shall complement the Escale_{IM} Suite. Bath shall be Kohler Model K-11343-_____.

ESCALE_{TM}

Technical Information

| Fixture:* | | | | | |
|---|--|-------------------|--|--|--|
| Bathing well | | | | | |
| Basin area | 46-3/4" (118.7 cm) x 21-5/8" (54.9 cm) | | | | |
| Top area | 69-15/16" (177.6 cm) x 34-3/8" (87.3 cm) | | | | |
| Weight | 68 lbs (30.8 kg) | | | | |
| To overflow | | | | | |
| Water depth | | 16-1/2" (41.9 cm) | | | |
| Capacity | | 71 gal (268.8 L) | | | |
| * Approximate measurements for comparison only. | | | | | |

| Included component: | |
|---------------------|-----------|
| Cut-out template | 1054544-7 |

Installation Notes


Install this product according to the installation guide.


Floor support under bath must provide for a minimum of 1800 lbs (816.5 kg).

Hot water supply should be 70% of capacity or greater. Installations will vary.

This bath is designed for drop-in installation only. It is not suited for use in a three wall alcove with an overhead shower.

No change in measurements with drain shown. (K-7214)

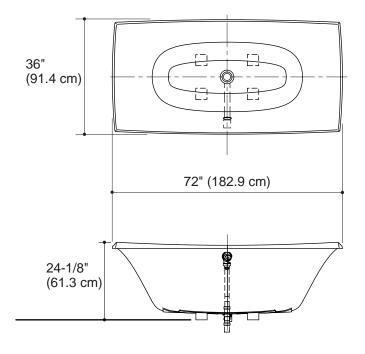



Product Diagram

