

PF9300J Series

Dual Flush Toilets



General Specifications

- Two-piece vitreous china
- Choose either 1.6 or 1.1 gallons per flush
- 2" glazed trapway
- Gravity fed, box rim
- HET, High Efficiency Toilet
- EPA WaterSense Certified
- Meets ANSI ASME A112.19.14-2006 and ASME A112.19.2M
- 9" x 7" water surface
- Available in round, elongated and ADA
- Close coupled tank with cover
- Color matched trip lever
- Available in white only
- Seat and supply not included
- Anti-siphon fill valve



PF9301J/PF9312

Model Numbers

PF9300JWH	Bowl HET Dual Flush RF White
PF9301JWH	Bowl HET Dual Flush EB White
PF9303JWH	Bowl HET Dual Flush ADA White
PF9312WH	Tank HET Dual Flush 1.1/1.6 gpf, 12" Rough-in, White
PF9310WH	Tank HET Dual Flush 1.1/1.6 gpf, 10" Rough-in, White
PF9312RWH	Tank HET Dual Flush 1.1/1.6 gpf, Right Hand, White
PF9312UWH	Tank HET Dual Flush 1.1/1.6 gpf, Insulated Tank, White

Parts Available

PF9312FLPK	Fill valve assembly
PF9312FVPK	Dual flush tower assembly (includes white trip lever)
PFTGPK	Tank gasket w/bolts
PF5112LIDWH	Tank lid white

Detailed Use Instructions

The Dual Flush enables a 1.1 gallon flush by pushing the flush lever back for liquid or light waste.

The 1.6 gallon flush can be utilized by pulling forward on the trip lever providing a strong flushing action for bulk or solid waste.

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. All PROFLO fixtures carry a 1- year limited warranty. In an effort to continually improve our products, we will make design changes form time to time. We reserve the right to ship newly designed product to fill any order unless we agree in writing to do otherwise.






Dual Flush Toilets

Certifications

Meets strict flushing performance guidelines established by the EPA (Environmental Protection Agency) WaterSense program. Leadership in Energy and Environmental Design (LEED) Compliant. Los Angeles Department of Water and Power (LADWP) Compliant.

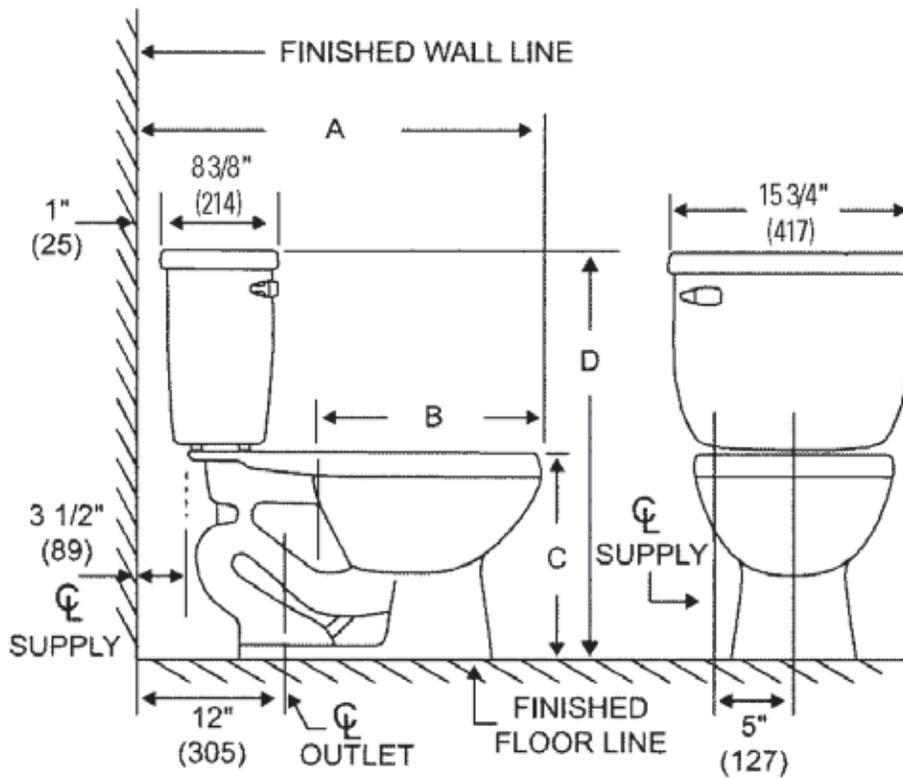

	RF	EL	ADA
	PF9300	PF9301	PF9303
A	28-1/4"	30-1/4"	30-1/4"
B	16-1/2"	18-1/2"	18-1/2"
C	14-5/8"	14-5/8"	17"
D	28-7/8"	28-7/8"	31-1/4"