



Job Name:

Job Type:

Comments:

Quantity:

Product Number: 11028QC

Specification Images



11028QC - New Construction - IC Airtight 6" Housing with "Quick Connects"

New Construction Airtight IC Housing with Quick Connects

IC housing is approved for use in direct contact with insulation

Housing adjusts vertically for various ceiling thicknesses

Break-away bar hangers easily extend and will not fall out of plaster flange, providing sturdy installation

Snap-In Socket locates lamp in optimum location

No clips required. Secure bar hanger to T-Bars with wires or screws

Tab to locate on bottom of joist

Meets airtight requirements for 2.0 CFM or less air leakage

Junction box with integral romex connector, quick push and lock connector and through circuit wiring with 4 in, 4 out #12 wire, saves installation time.

The hinged junction box door allows full access for wiring while remaining attached to the recess housing

Tighten screw to lock bar hangers in place

Integral captive nails included and positioned for fast, easy installation



One piece sealed trims. No light leaks

UPC #: 785652110290

Product Type: Recessed Light

Features:

Title 24

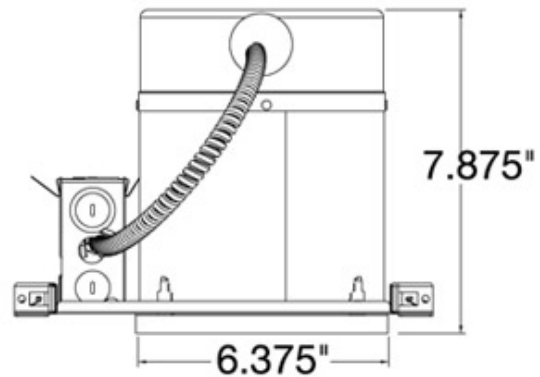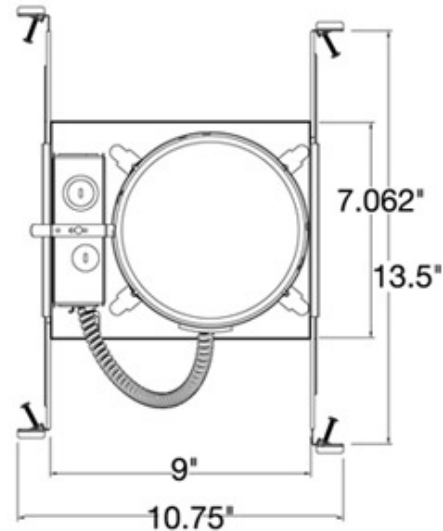

Dimensions:

Diameter: 6 3/8"

Switch Type: N/A

Length: 13 1/2"

Mounting Proc.: Other

Width: 10 3/4"

Height: 7 7/8"

Weight: 2.2 lbs.

Bulbs:

- 1 - Medium Par30S 50w max 120v - Not included
- 1 - Medium Par30 75w max 120v - Not included
- 1 - Medium Par38 90w max 120v - Not included
- 1 - Medium BR-30 65w max 120v - Not included
- 1 - Medium BR-40 90w max 120v - Not included
- 1 - Medium Par30L 75w max 120v - Not included
- 1 - Medium BR-30 65w max 120v - Not included
- 1 - Medium Par30S 50w max 120v - Not included
- 1 - Medium Par30L 75w max 120v - Not included
- 1 - Medium Par38 90w max 120v - Not included

- 1 - Medium BR-30 65w max 120v - Not included
- 1 - Medium BR-40 90w max 120v - Not included
- 1 - Medium Par30L 75w max 120v - Not included
- 1 - Medium BR-30 65w max 120v - Not included
- 1 - Medium Par30L 75w max 120v - Not included
- 1 - Medium BR-30 65w max 120v - Not included
- 1 - Medium A-19 40w max 120v - Not included
- 1 - Medium Par30S 50w max 120v - Not included
- 1 - Medium Par30L 75w max 120v - Not included
- 1 - Medium Par38 90w max 120v - Not included
- 1 - Medium A-19 40w max 120v - Not included
- 1 - Medium A-19 40w max 120v - Not included
- 1 - Medium A-19 40w max 120v - Not included
- 1 - Medium A-19 40w max 120v - Not included

Material List:

1 Housing - Steel/Aluminum - Raw Steel

Safety Listing:

cUL Listed for Damp Locations / IC
UL Listed for Damp Locations / IC

Instruction Sheets

English (HC-438)

Trim



11020AT-15

6" Open Trim

White Steel Trim
 Maximum Wattage:
 75w Par30L
 65w BR-30



11032AT-14

6" Multiplier Trim

White Trim / Baffle
 Aluminum Trim
 Maximum Wattage:
 75w Par30
 90w Par38
 65w BR-30
 90w BR-40
 50w Par30S



11032AT-172

6" Multiplier Trim

Antique Bronze Aluminum
 Aluminum Multiplier
 White Aluminum Trim
 Maximum Wattage:
 75w Par30
 90w Par38
 65w BR-30
 90w BR-40
 50w Par30S



11032AT-22

6" Multiplier Trim

Polished Aluminum Aluminum
 Aluminum Multiplier
 White Aluminum Trim
 Maximum Wattage:
 75w Par30
 90w Par38
 65w BR-30
 90w BR-40
 50w Par30S



11032AT-71

6" Multiplier Trim

Antique Bronze Aluminum
 Aluminum Multiplier
 Antique Bronze Aluminum Trim
 Maximum Wattage:
 75w Par30
 90w Par38
 65w BR-30
 90w BR-40
 50w Par30S



11032AT-849

6" Multiplier Trim

Satin Nickel Aluminum
 Trim
 Maximum Wattage:
 75w Par30
 90w Par38
 65w BR-30
 90w BR-40
 50w Par30S



11032AT-861

6" Multiplier Trim

Satin Nickel - White Aluminum
 Aluminum Multiplier
 White Aluminum Trim
 Maximum Wattage:
 75w Par30
 90w Par38
 65w BR-30
 90w BR-40
 50w Par30S



11033AT-15

6" Flat Glass Shower Trim

Satin White Glass Diffuser
 White Aluminum Reflector
 White Aluminum Trim
 Maximum Wattage:
 40w A-19
 Suitable For Shower Light



11034AT-15

6" Drop Lens Shower Trim

Satin White Glass Diffuser
 White Aluminum Reflector
 White Aluminum Trim
 Maximum Wattage:
 40w A-19
 Suitable For Shower Light



11035AT-15

6" Flat Glass Trim

Satin White Glass Diffuser
 White Aluminum Reflector
 White Steel Trim
 Maximum Wattage:
 40w A-19
 Suitable For Shower Light



11037AT-15

6" Regressed Eyeball Trim

White
 White Steel Trim
 Maximum Wattage:
 75w Par30L
 65w BR-30



11039AT-15

6" Wall Wash Trim

White Steel Housing
 White Steel Trim
 Maximum Wattage:
 40w A-19



11055AT-15

6" Fresnal Glass Shower T

Clear Glass Glass
 White Aluminum Reflector



1136AT-15

6" Eyeball Trim

White
 White Steel Trim



1151AT-14

6" Baffle Trim

White Trim / Baffle Aluminum
 Trim



1151AT-15

6" Baffle Trim

Black Aluminum Baffle
 White Aluminum Trim

White Aluminum Trim
 Maximum Wattage:
 40w A-19
 Suitable For Shower Light

Maximum Wattage:
 75w Par30L
 65w BR-30

Maximum Wattage:
 75w Par30L
 90w Par38
 65w BR-30
 90w BR-40
 50w Par30S

Maximum Wattage:
 75w Par30L
 90w Par38
 65w BR-30
 90w BR-40
 50w Par30S



1154AT-14

6" Open Cone Shower Trim

White Trim / Baffle Aluminum
 Baffle
 White Trim / Baffle Aluminum
 Trim
 Maximum Wattage:
 50w Par30S
 75w Par30L
 90w Par38
 Suitable For Shower Light

Shipping Information

Package Type	Quantity	UPC	Length	Width	Height	Cube	Weight	UPS Ship	Label
Individual	1	785652110290	14.3	9.3	8	0.616	2.26	Yes	C IP-3
Master Pack	6	10785652110297	25.25	18.5	8.75	2.365	15.686	Yes	A M-1
NJ Pallet	192		48	40	77	85.556	502	No	
NV Pallet	192		48	40	77	85.556	502	No	