

5.5' ACRYLIC BATH K-1229


Features

- Acrylic
- Left or right drain
- Integral tile flange
- Integral apron
- 66" (167.6 cm) x 36" (91.4 cm) x 20" (50.8 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1
- IAPMO/UPC

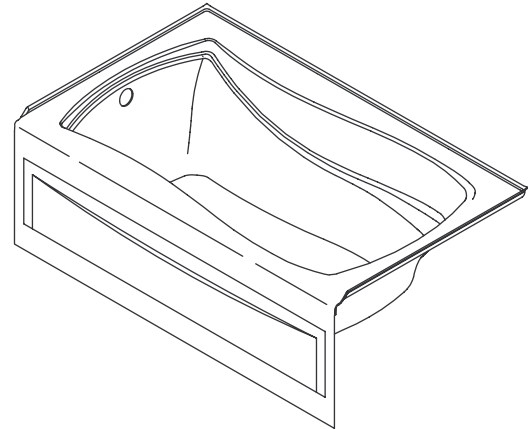

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

For complete faucet, both faucet trim and Rite-Temp valve must be specified.

Model	Description	Colors/Finishes		
K-1229-LA	Bath with left outlet, integral apron (shown)	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
K-1229-RA	Bath with right outlet, integral apron	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
Recommended Accessories				
K-7161-AF	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Product Specification:

The bath shall be 66" (167.6 cm) in length, 36" (91.4 cm) in width, and 20" (50.8 cm) in height. Bath shall be made of acrylic. Bath shall have a right or left outlet. Bath shall have an integral apron. Bath shall be Kohler Model K-1229-____-____.

MARIPOSA™

Technical Information

Fixture:*	basin area	top area	weight
Bathing well	48" (121.9 cm) x 24" (61 cm)	59" (129.5 cm) x 20" (149.9 cm)	65 lbs. (30 kg)
To overflow	14" (35.6 cm)	67 gal. (254 L)	

* Approximate measurements for comparison only.

Installation Notes


Install this product according to the installation guide.

NOTE: Unless otherwise specified, floor support under bath must provide for a minimum of 80 lbs./square foot (390 Kg./square meter) loading.

If installing a rim mount faucet, make sure any plumbing does not interfere with the drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

No change in measurements with drain shown. (K-7161-AF or K-7161M-AF)

█ Recommended faucet area.

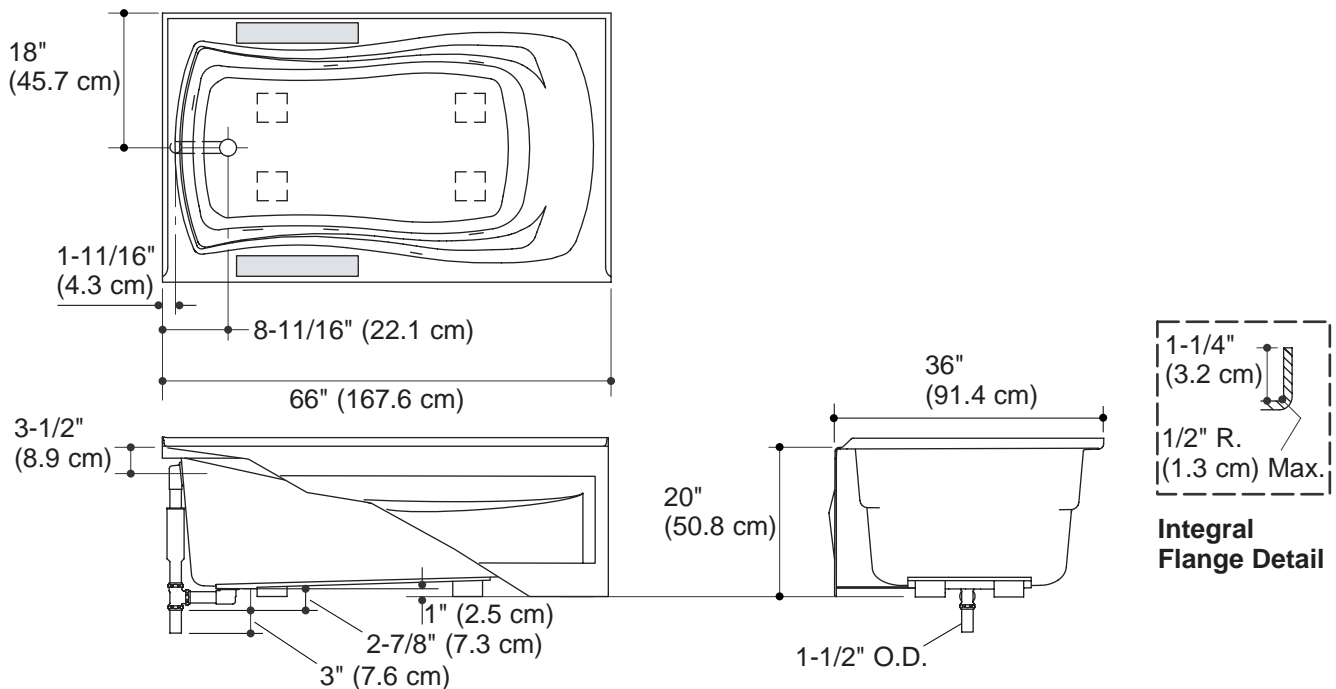

Product Diagram