CD40022/40522 - CUBE ICE DISPENSER





CD40022 WITH CIM0320

Features

- Only 22" (559 mm) wide.
- Storage 120 lbs (54 kg) of ice per day.
- Turbo Dispense dispenses 1/4 lbs of ice per second.
- Power Clean allows access to the bin for easy cleaning without moving the ice machine. Interlock safety switch turns off machine agitation when top-front access panel is removed.
- 4" (102 mm) foam insulation for maximum ice preservation no more quick melting ice.
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.
- · Great for hard water, food safety and tight spaces.
- User friendly push-to-dispense operation.

CUBE			
Full Cube Dimensions			
W x D x H (in.)	7⁄8 x 7∕8 x 7∕8		
W x D x H (mm)	22 x 22 x 22		
Half Cube Dimensions			
W x D x H (in.)	3/8 x 7/8 x 7/8		

10 x 22 x 22

W x D x H (mm)

ICE PRODUCTION FOR OPTIONAL CUBE ICE MAKERS-LBS. (KG) PER 24 HOURS*				
Model Number	CIM0320	CIM0520	CIMO826	CIM1126
Air	313 (142)	561 (254)	896 (406)	932 (423)
Water	316 (143)	586 (266)	896 (406)	968 (439)
Remote	N/A	N/A	906 (411)	968 (439)
Voltage	115/60/1	115/60/1	208-230/60/1	208-230/60/1

*Tested at 70°F Air/50°F Water.


All specifications and performance data are subject to normal manufacturing variances.

Daily ice production based on half cube configuration.



CD40022/40522 - CUBE ICE DISPENSER



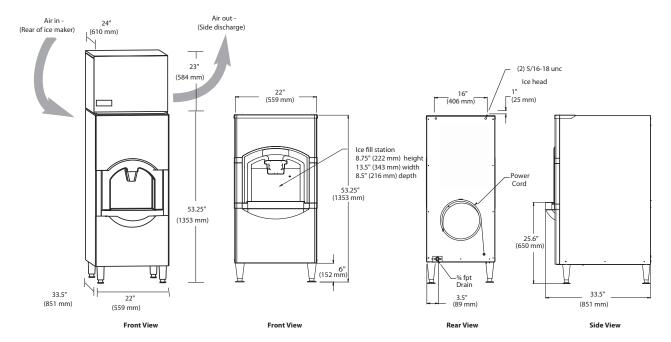

Operating Requirements

	MINIMUM	ΜΑΧΙΜυΜ	
		60 Hz	50Hz
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)	110°F (43°C)
Water Temp.	40°F (4.4°C)	100 1 (30 C)	90°F (32°C)
Water Pressure	20 PSIG (1.4 BAR)	60 PSIG (4.1 BAR)	

Dimensions (dispenser only)

ALL MODELS			
W x D x H (in.)	22 x 33.5 x 53.25		
W x D x H (mm)	559 x 851 x 1,353		

Specifications

Model Number	Dispenser Operation	ARI Bin Storage Ibs (kg)	Voltage Characteristics	Min. Circuit Ampacity	Max Fuse Size
CD40022*	Push	120 (55)	115/60/1	2.1	15
CD40522	Push	120 (55)	230/50/1	2.1	15

Note #1: Model CD40022 and CD40522 dispensers accept all 22" CIM Series™ Cube Ice Makers. Note #2: CD40022 and CD40522 Series units do not require an Adaptor and Bin Level Kit.

NOTES: Number of Wires: 3 (includii Approx. Shipping Weight Ibs (kg): 230 (105) Refrigerant Type: R404A *Cordset included

3 (including ground) 230 (105) R4O4A