


Type	-43	-77	-81
P3724	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
P3725	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
P3726	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish			Lamping	Dimensions (Inches)	
	Colonial Silver	Forged Bronze	Antique Nickel		A	B
P3724	-43	-77	-81	2 (m) 60w	11-3/4	6
P3725	-43	-77	-81	2 (m) 75w	13	6
P3726	-43	-77	-81	3 (m) 60w	15	6-3/4

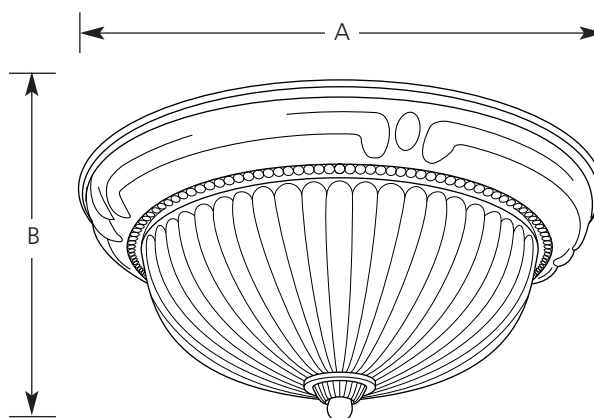

**Specifications:**

General

- Etched ribbed glass  
P3724: 8-3/8" dia., 8.5" OD Lip, 3.094" ht.  
P3725: 9.688" dia., 3.344" ht., 9.875 OD Lip  
P3726: 11.563" dia., 3.969" ht., 11.75" OD Lip
- Traditional Style
- Plated finishes
- Detailed stamped ceiling pan with pattern and beads
- Forged Bronze (-77) is steel construction, all the rest are solid brass
- Center lock up
- Companion fixtures: Chandeliers, hall and foyer, other close-to-ceiling, bath and vanity, and pendant

Mounting

- Ceiling mount - flush
- Covers outlet box
- Mounting strap for outlet box included
- Center glass lock up

Electrical

- Medium base ceramic sockets
- Pre-wired

Labeling

- UL-CUL damp location listed





# P3726 HUNTINGTON - FLUSH MOUNT



Report No. 2000036

No. Lamps: 3 Type Lamp: 60A19 GE Total Lumens: 2595

Fixture Efficiency: 53.1%


S/MH Ratio: 1.3

## Quick Calculator Charts

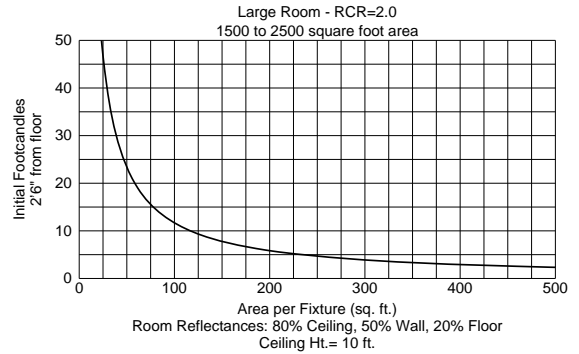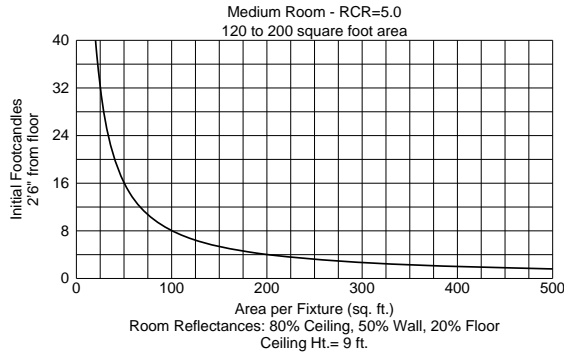

### DISTRIBUTION CURVE

### INTENSITY DATA

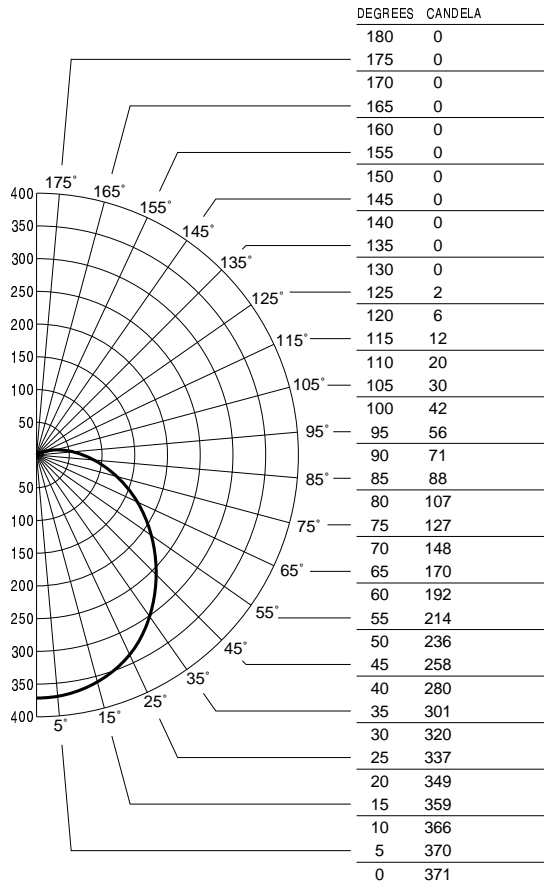

## Single Fixture Data

Ceiling Ht.(Ft.)	10% Values		Zero Degrees Ft.-C	50% Values	
	Beam Angle - 112'			Beam Angle - 65'	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	1.2	16	12.3	6.1	7
10	0.7	22	6.6	3.3	10
12	0.4	28	4.1	2.1	12
14	0.3	34	2.8	1.4	15
16	0.2	40	2.0	1.0	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

### ZONAL CAVITY COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 0.20

RC	Effective Floor Cavity Reflectance 0.20																							
	80				70				50				30				10				0			
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
0	62	62	62	62	60	60	60	60	57	57	57	53	53	53	50	50	50	49						
1	55	52	49	47	53	51	48	46	48	45	44	45	43	41	42	41	39	38						
2	50	45	41	37	48	43	40	36	41	38	35	38	36	33	36	34	32	31						
3	45	39	34	30	43	38	33	30	36	32	29	34	30	28	32	29	27	25						
4	41	34	29	25	40	33	29	25	31	27	24	30	26	23	28	25	23	21						
5	38	31	25	22	36	30	25	21	28	24	21	27	23	20	25	22	20	18						
6	35	27	22	19	34	27	22	19	25	21	18	24	20	18	23	20	17	16						
7	32	25	20	17	31	24	20	16	23	19	16	22	18	15	21	18	15	14						
8	30	23	18	15	29	22	18	14	21	17	14	20	16	14	19	16	13	12						
9	28	21	16	13	27	20	16	13	19	15	13	18	15	12	18	14	12	11						
10	26	19	15	12	25	19	14	12	18	14	11	17	14	11	16	13	11	10						