


INSTALLATION AND SAFETY INSTRUCTIONS

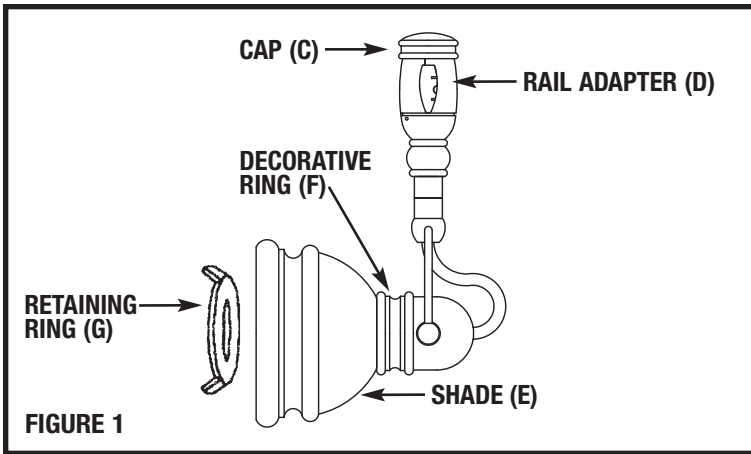


INSTALLATION TO RAIL

1. Remove retaining ring (G) from socket.
2. Place decorative ring (F) and shade (E) onto socket and secure by threading retaining ring (G) onto socket.
3. Install lamp. Thread supplied lamp enclosure over lamp.
4. Unthread cap (C) from rail adapter (D).
5. Making sure contacts (A) will align with conductors (B) on rail, set the bottom of the rail adapter (D) to the bottom of the rail and "roll" rail adapter (D) up onto the rail.
6. Close hinged side of rail adapter (D) up onto rail and thread cap (C) back onto top of rail adapter (D).

IMPORTANT SAFETY INSTRUCTIONS

- Be sure the electricity to the system you are working on is turned off; either the fuse removed or the circuit breaker set at off.
- For use with the 120V Transitions track series by Sea Gull Lighting.
- Caution – To reduce the risk of burn during relamping remove from the track before relamping.
- Use of other manufacturers components will void warranty, listing, and create a potential safety hazard.
- If you are unclear as to how to proceed, contact a qualified electrician.
- Minimum distance from the front of the lamp to combustible surfaces is 8".
- Make sure all connections are tight.
- Dimming halogen lamps greatly reduces lamp life.
- To reduce the risk of FIRE or INJURY TO PERSONS: Turn off and allow to cool before replacing lamp.
- Lamp gets HOT quickly! Contact switch only when turning on.
- Do not touch hot lens, guard, or enclosure.
- Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
- Do not operate the luminaire fitting with a missing or damaged shield.
- Save these instructions.

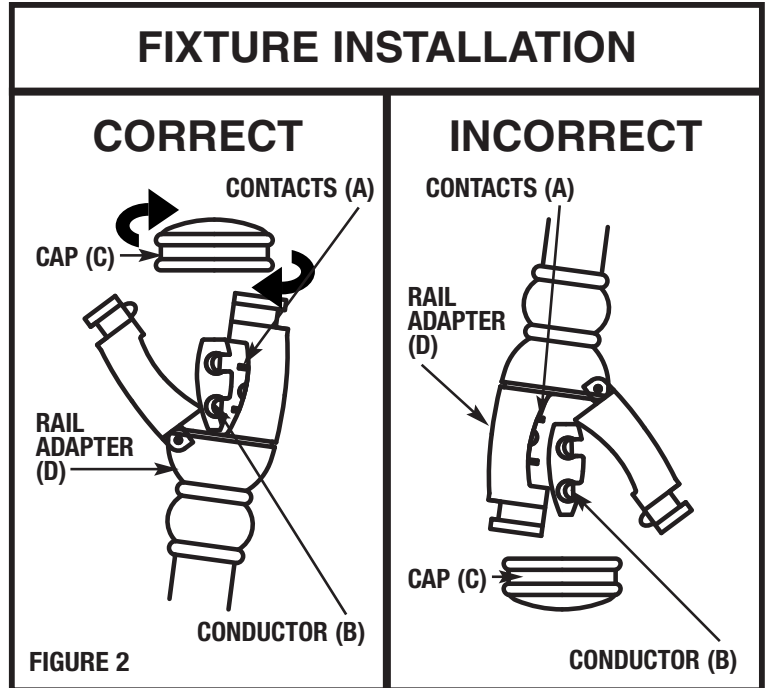

AMBIANCE®
LIGHTING SYSTEMS

LR-107

062308

www.SeaGullLighting.com