ASSEMBLY AND INSTALLATION INSTRUCTIONS

CH35403 / CH35455

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

Installation Steps

- 1. Attach the nipple-1 to the mounting strap, and then secure with a washer and a hex nut.
- 2. Attach the mounting strap to the ceiling box by using two mounting screws.
- 3. Screw the rod onto the nipple-3 of the fixture tightly.
- 4. Attach one end of the arm-1 onto the arm-2 by inserting the set screw, and then secure with the bolt nut.
- 5. Attach the other end of the arm-1 to the rod by inserting the set screw, and then secure with the bolt nut.
- 6. Do the same way for other arms-1.
- 7. Secure the loop to the nipple-2 of the fixture.
- 8. Choose the certain length of the chain you need, and then weave the fixture wire and the grounding wire through the chain. Then connect one end of the chain with the loop by using the loop lock.
- 9. Secure the top loop to the nipple-1 tightly.
- 10. Thread the fixture wire and grounding wire through the collar, top loop, canopy, nipple-1 and mounting strap in order.
- 11. connect the other end of the chain with the top loop by using the loop lock.
- 12. Make wire connections with wire nuts:
 - ---The smooth wire (marked) from fixture to the black wire from power source.
 - ---The ridged wire (unmarked) from fixture to the white wire from power source.
 - ---Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with the wire nut.
 - Carefully tuck wires back into the ceiling box.
- 13. Attach the canopy to the mounting strap by inserting the top loop, and then secure with the collar.
- 14. Attach the glass shades to the glass holders, and then secure with socket rings.

Note: The glass shades should be all in horizontal line.

- 15. Install bulbs. (Please do not exceed the maximum capacity that is recommended on the package.)
- 16. Turn on the power at fuse or circuit box.

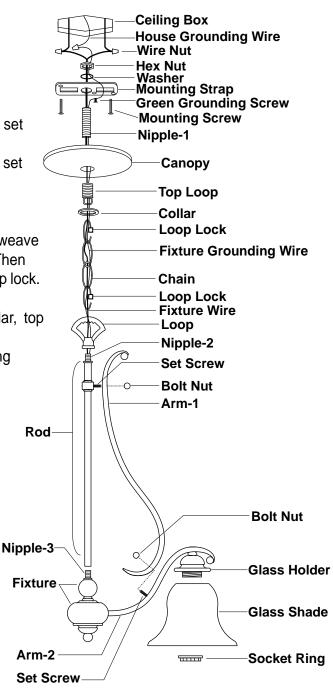

050701