



SPECIFICATIONS  
**SEV28SS**  
 POWER PACKS

**2100 HVI CERTIFIED** 500 CFM/11.5 Sones @ 0.10" SP.

**Dimensions**

Overall bottom projection - 11"  
 Height - 11"  
 Width: 28"

**Hood Body**

All metal galvanized steel with stainless steel fascia.

**Motor**

3 speed, permanently split capacitor motor. Rated 120 volts, 60 hz.

**Lighting**

Two - GU10 base, MR16, 50 watt halogen lights.

**Ducting Options**

Vertical ducting: 6" round duct adapter complete with aluminum back draft damper.

**Blower Wheel**

Dual inlet, electronically balanced polymeric centrifugal blower wheel, 5¾" width 59 paddles.

**Cut Out Opening Size**


Width 27"  
 Depth - 10"

**Filters**

Model SVGF03 aluminum grease filters (included).

**Available Finishes**

Stainless Steel.

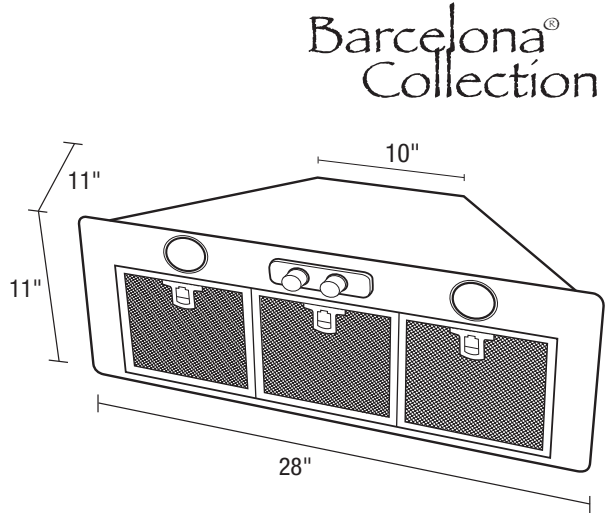

**EXPANDED PERFORMANCE**

Air Flow - CFM	Static Pressure (inches of w.g.)						Sones @ .1 SP	Fan Speed RPM	Power Watts	Amps
	0	0.1	0.125	0.25	0.375	0.5				
	510	500	497	485	472	459	11.5	2750	460.0	

<b>PROJECT</b>					<b>ARCHITECT</b>				
<b>LOCATION</b>					<b>ENGINEER</b>				
<b>CONTRACTOR</b>					<b>SUBMITTED BY</b>			<b>DATE</b>	
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS



**U.S.:** 820 Lincoln Avenue  
 West Chester, Pennsylvania 19380-4466  
 Tel: (610) 692-7400 • 877-304-3785  
 Fax: (610) 696-8048

**Canada:** 8 Edvac Drive  
 Brampton, Ontario L6S 5P2  
 Tel: (905) 456-2033 • 800-250-8767  
 Fax: (905) 456-1015