

CADET® 3 ELONGATED TOILET
with the FLUSH RIGHT™ SYSTEM

- 2383.012**
 - Vitreous china
 - Low-consumption (6.0 Lpf/1.6 gpf)
 - EverClean™ anti-microbial ceramic glaze
 - Featuring the **Flush Right™ System**
 - Elongated siphon action jetted bowl
 - Fully-glazed 2-1/8" trapway with 2" ball pass
 - Generous 9" x 8" water surface area
 - Close-coupled tank with flat tank cover for superior storage
 - Oversized 3" flush valve with chemical resistant flapper
 - Chrome trip lever
 - New Speed Connect™ tank-to-bowl coupling system
 - New sanitary dam on bowl with four point tank stabilization
 - 2 color-matched bolt caps
 - 100% factory flush tested
- 3014.016** Elongated Bowl
- 4021.016** Tank



Nominal Dimensions:
 768 x 438 x 733mm (30-1/4" x 17-1/4" x 28-7/8")
 Fixture only, seat and supply by others

Alternative Tank Configurations Available:


- 4021.500** Tank complete with Aquaguard Liner
- 4021.600** Tank complete with tank cover locking device
- 4021.700** Tank complete with Aquaguard Liner and tank cover locking device
- 4021.800** Tank complete with trip lever located on right side
- 4021.900** Tank complete with tank cover locking device and trip lever located on right side

Compliance Certifications - Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures - includes Flush Performance, Ball Pass Diameter, Trap Seal Depth and all Dimensions
- Los Angeles Department of Water and Power Supplementary Purchase Specification for Non-Adjustability

To Be Specified:

- Color: White Bone Silver Linen Black
- Seat: #5325.010 Elongated Champion® Slow Close solid plastic seat and cover with easy lift off feature
- Seat: #5284.016 Elongated EverClean™ anti-microbial solid plastic seat and cover
- Seat: #5311.012 Elongated Laurel molded wood seat and cover
- Supply with stop:

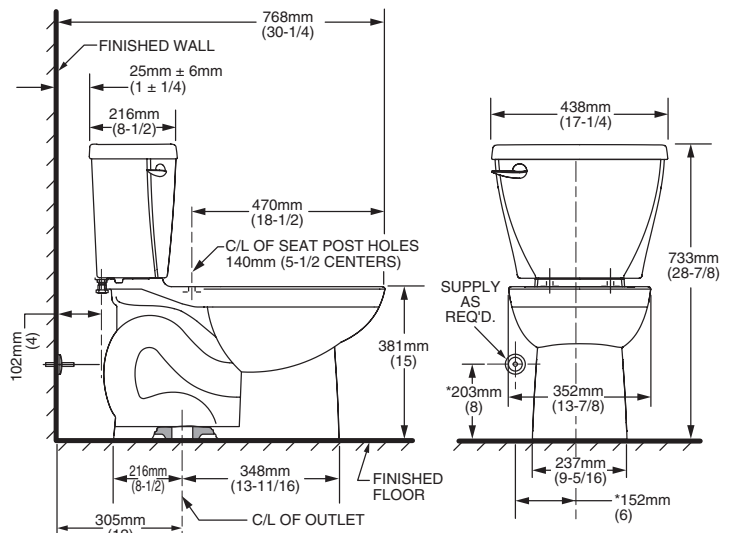

NOTES:
 THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.
 SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
 * DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



Cadet® 3 Toilet
 featuring the Flush Right™ system