
THIS SPACE FOR DESIGNER/ ENGINEER APPROVAL					
Job/Customer	Date	Contractor			
Model Specified	Qty	Approved By			
Designer/Engineer	Date	Contractor's PO#			
Submitted by	Date	Other			

## 4390 Series

## STANDARD PORT 316 STAINLESS STEEL BALL VALVES 1 PIECE INVESTMENT CAST W/ 304 STAINLESS STEEL LOCKING HANDLE IPS - 1000 WOG / 150 WSP - ISO 9001:2008

ITEM#	SIZE	P/CARTON	P/CASE	A	В	С	D	Cv
43900	1/4"	4	200	1/4	1 1/2	1 5/16	2 3/4	4.8
43901	3/8"	4	200	3/8	1 11/16	1 5/16	3	6.2
43902	1/2"	2	100	1/2	2 3/16	1 1/2	3 7/8	7.6
43903	3/4"	2	80	11/16	2 5/16	2	3 7/8	13.6
43904	1"	2	50	7/8	2 13/16	2 3/16	4 13/16	25.0
43905	1 1/4"	2	30	1	3	2 7/16	4 13/16	36.3
43906	1 1/2"	2	30	1 1/4	3 3/8	2 15/16	5 3/4	92.0
43907	2"	2	30	1 1/2	3 15/16	3 1/4	5 3/4	139.4

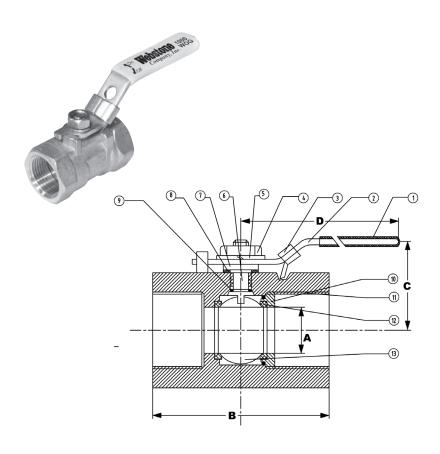

NO.	DESCRIPTION	MATERIAL
1	HANDLE JACKET	PLASTIC
2	LOCKING	STAINLESS STEEL 304
3	HANDLE	STAINLESS STEEL 304
4	HANDLE NUT	STAINLESS STEEL 304
5	SPRING WASHER	STAINLESS STEEL 304
6	STEM	STAINLESS STEEL 316
7	PACK RING	STAINLESS STEEL 304
8	PACKING GLAND	PTFE
9	THRUST WASHER	PTFE
10	END CAP	STAINLESS STEEL 316
11	BODY	STAINLESS STEEL 316
12	SEAT	PTFE
13	BALL	STAINLESS STEEL 316

TEMP °F	WOG
100	1000
150	1000
200	1000
250	1000
300	1000
350	N/A
366	N/A

Specifications: Designed for commercial and industrial use with a broad range of fluid handling applications. This approved Webstone valve is actuated by a blowout proof stem and features an adjustable packing nut with locking device. Threaded ends comply with ANSI B1.20.1



Quality and Commitment Since 1954

Tel: (800) 225-9529 • Fax (800) 336-5133